


LANT GRAD 80 IN CONFORMITATE CU EN 818-2

LANT DE RIDICAT SARCINI

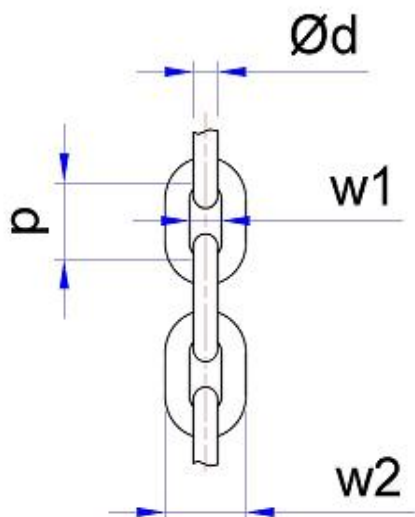

OTEL ALIAT GRAD 80 Capacitate W.L.L. [tone]	LANT Ø mm	P	W1 min	W2 max	GREUTATE Kg / m
		PAS mm	Latimea interioara mm	Latimea exterioara mm	
1,12	6	18	7,8	22,2	0.80
1,5	7	21	9,1	25,9	1.10
2	8	24	10,4	29,6	1.40
3,15	10	30	13	37	2.20
5,3	13	39	16,9	48,1	3.80
8	16	48	20,8	59,2	5.70
12,5	20	60	26	74	9.00
15	22	66	28,6	81,4	10.90
21,2	26	78	33,8	96,2	15.20
31,5	32	96	41,6	118	23.00

- Grad 8 : **Coefficient de siguranta 4**
- Culoare **NEGRU**

W.L.L. este aplicabila in conditii de lucru normale de la:

- 40°C pana la 200°C	peste 200°C pana la 300°C	peste 300°C pana la 400°C
100%	90%	75%

GO BACK